

Installation Notice

Install in the reverse order of removal. Adjust pedal stroke after installation.



NOTICE

- Apply long-life grease (T/M DBL 6611.00) to the connections.
- Remove foreign materials.
- Keep the tightening torque.
- Replace the bushings with new ones.

Inspection and Adjustment

1. Pedal Stroke (A)

Maximum pedal stroke	140 mm
----------------------	--------

2. Pedal Height (B)

Height (from carpet)	181 ± 5 mm
----------------------	------------



NOTICE

- To adjust the pedal stroke, loosen the lock nut (C) of the stopper bolt (D) and turn the stopper bolt until the stroke is correct. After adjustment, tighten the lock nut.


3. Pedal Free Play (E)

Free play	5 ~ 15 mm
-----------	-----------



NOTICE

- To adjust the pedal free play, loosen the lock nut (F) of the master cylinder and turn the push rod until the free play is correct.

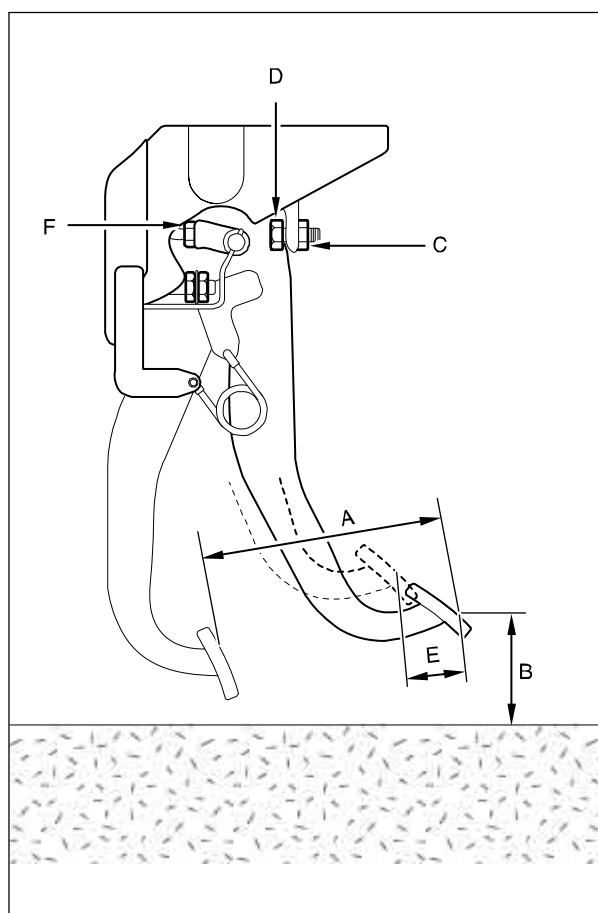

4. Check the fulcrum bolt and the bushing for wear, the pedal for bending and the spring for damage.